



Bobcat®

MINI TRACK LOADERS
MT55



One Tough Animal®

MT55 — SPECIFICATIONS

Machine Rating

| | |
|-------------------------------------|-------------|
| Rated operating capacity (ISO 5998) | 254 kg |
| Tipping load (ISO 8313) | 732 kg |
| Pump capacity | 45.40 L/min |
| System relief at quick couplers | 200.00 bar |
| Travel speed, reverse | 2.3 km/h |
| Travel speed, forward | 5.6 km/h |

Engine

| | |
|--------------------------------|-------------------|
| Make / Model | Kubota / D902-E3B |
| Fuel | Diesel |
| Cooling | Liquid |
| Power at 3600 RPM (ISO 9249) | 18.5 kW |
| Torque at 2600 RPM (SAE J9249) | 54.2 Nm |
| Number of cylinders | 3 |
| Displacement | 0.90 L |
| Fuel tank | 26.50 L |

Weights

| | |
|------------------|---------|
| Operating weight | 1186 kg |
| Shipping weight | 1109 kg |

Controls

| | |
|---------------------------------|--|
| Vehicle steering | Direction and speed controlled by one hand lever |
| Loader hydraulics tilt and lift | Hand lever |

Drive System

| | |
|--------------|---|
| Transmission | Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors |
|--------------|---|

Standard Features

| | |
|--|---|
| Auxiliary hydraulics | Parking brake |
| Bob-Tach™ | Reverse travel stop panel |
| Built-in tie down and crane/lift locations | Spark arrestor muffler |
| Hydraulic drive train | Tilt lockout |
| Instrumentation | Tracks — rubber — 180 mm |
| Lift arm lockout with manual bypass | CE certification |
| Lift arm support | Warranty: 12 months or 2000 hours, whichever occurs first |
| Neutral start interlocks | |


Options

| | |
|----------------------------|------------------|
| Attachment control kit | Light kit |
| Catalytic exhaust purifier | Ride-on platform |
| Engine block heater | Shutdown kit |

Environmental

| | |
|--|-----------------------|
| Noise level LpA(EU Directive 2000/14/EC) | 88 dB(A) |
| Noise level LWA(EU Directive 2000/14/EC) | 103 dB(A) |
| Hand-arm vibration (ISO 5349-1) | 6.15 ms ⁻² |

Dimensions

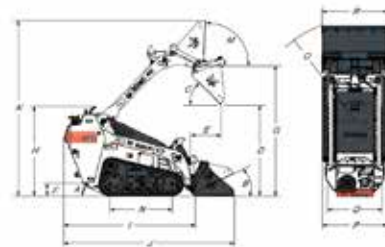

| | | | |
|-----|-----------|-----|-----------|
| (A) | 23.3° | (I) | 1838.0 mm |
| (B) | 168.0 mm | (J) | 2365.0 mm |
| (C) | 22.0° | (K) | 2422.0 mm |
| (D) | 49.6° | (M) | 82.3° |
| (E) | 1265.0 mm | (N) | 863.0 mm |
| (F) | 463.0 mm | (O) | 1395.0 mm |
| (G) | 114.0 mm | (P) | 903.0 mm |
| (H) | 1807.0 mm | (Q) | 724.0 mm |
| | | (R) | 914.0 mm |

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.



Bobcat is a Doosan Company.

Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.
©2017 Bobcat Company. All Rights Reserved.



Bobcat®

www.bobcat.com