

## GREEN CLIMBER

# **LV 600 PRO**



# A STURDY MACHINE FOR THE TOUGHEST OF TASKS

VARIOUS ACCESSORIES AVAILABLE FOR LANDSCAPE MAINTENANCE, CLEARING ROAD BANKS OR FORESTRY TASKS.



## LOWER FUEL CONSUMPTION, **BETTER MANOEUVRABILITY** AND EASIER TRANSPORT

Compact dimensions and low weight allow Green Climbers to have the best power-to-weight ratio.



#### **GREATER STABILITY**

The variable width undercarriage achieves an unrivalled stability on uneven and steep terrain and can be adjusted directly from the remote control.



### **GREATER FLEXIBILITY**

The tool's lateral movement enables work beyond the machine's footprint of up to 1000 mm.

**GREATER STABILITY AND** 

TRACKS ALWAYS IN PLACE

Our undercarriage with its patented

track guard system dramatically

increases stability and reliability.



## **CONTINUOUS OPERATIONS**

**SLOPES OF UP TO 60°** 

even in extreme conditions.

The reversible fan and oversized radiator allow continous work in dusty and high temperature environments.



#### INCREASED FOOTPRINT

The LV 600 PRO has the ability to work even on muddy or loose soil.



### TIME SAVINGS

The rapid connect/disconnect system allows for time savings for changing the attachments. A tool-less method to change attachments for the job at hand.


















# Green Climber - LV 600 PRO

# TECHNICAL SPECIFICATIONS

| Dry Weight                  | 1520 kg                    |
|-----------------------------|----------------------------|
| Work Gradient               | 60°                        |
| Extendable Undercarriage    | 1360 mm / 1760 mm          |
| Attachment Sideshifting     | 500 mm + 500 mm            |
| Engine                      | KOHLER KDI1903TCR          |
| N. of Cylinders             | 3                          |
| Engine Power                | 56.3 hp / 42 kw            |
| Engine Torque               | 225 Nm @ 1500 rpm          |
| Emissions                   | Stage V - EPA Tier 4 Final |
| Fuel Tank Capacity          | 34 L Diesel                |
| Cooling System              | Liquid                     |
| Main Attachment Pump        | 83 L/m @ 320 bar ි         |
| Service Pump                | 22 L/m @ 180 bar           |
| Hydraulic Oil Tank Capacity | 32 L Î                     |
| Hydraulic Auxiliary Lines   | 3 Proportional             |
| Transmission                | Hydraulic Proportional     |
| Speed                       | 9 km/h                     |
| Reversible Fan              | Yes                        |
| CLIPP CLOSE ( )             |                            |

© MDB Srl 2024 - Image, technical and construction specifications subject to change with no obligation of prior notification. All rights reserved.

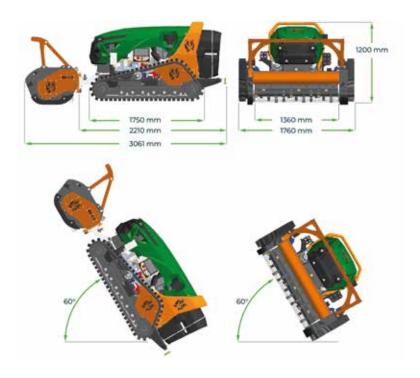



MDB srl

www.mdbsrl.com

Via Cupone 13 66022 Fossacesia (CH) Italia

